

Dimensions: 63,4 x 84,4 x 18,2 cm / 25" x 33,2" x 7,2" (W x H x D)

via sis PLUS SMILE



Smile function



Speed limit function



LED color change



Data storage


Secures you with a smile*. The LED graphics ☺/☹ give all traffic an additional feedback on driver behavior. With speed limit function, data storage and LED color change.

*If you do not exceed the speed limit

Technical specifications:

- Speed limit function if speed limit is exceeded
 - Shows the speed limit sign
 - Alternating between driven speed and speed limit sign
- Smile function
- Adjustable parameters for min. and max. displayed speed, LED color change, blinking display, speed limit and smile function
- Different parameter settings depending on time and day (5 parameter sets)
- LED color change if speed limit is exceeded
- Timer and automatic daylight saving time
- Data storage in a ring buffer (exact to the second)
- Bidirectional measurement adjustable
- Battery level indicator
- Bluetooth communication with viagraph 5 (PC) or App (Android)
- Lightweight and compact aluminum casing
- 3-digit high performance LED display with automatic adaption of brightness (digit height 32,5 cm / 12,8")
- Specially designed protection mask for excellent visibility even under strong sunlight
- Extended speed range 1 - 199 kmh / mph and decimal point 1,0 - 19,9 kmh / mph
- USB interface for data download, changing parameters or firmware update by USB flash drive (optionally)
- Manual parameter setting by rotary switch (optionally)
- Automatic data transfer by email + GPS location (optionally)

Details:

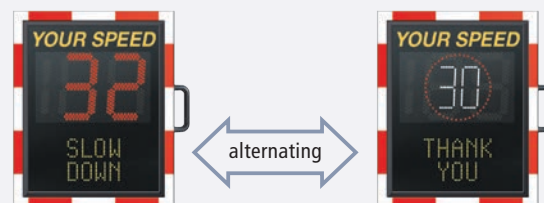

Continuously adjustable speed limit function from 1 bis 99 if speed limit is exceeded.





Smile function



Speed ok



Attention



LED graphics underneath the speed display.

